



Mechanical Specifications


**5' Orchard Shredder
Single End Drive**

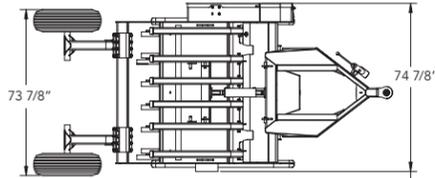


**7' Orchard Shredder
Single End Drive**

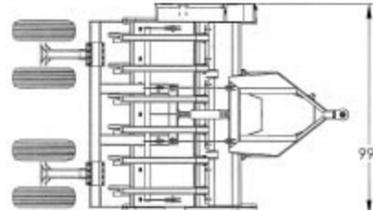


**7' Orchard Shredder
Dual End Drive**

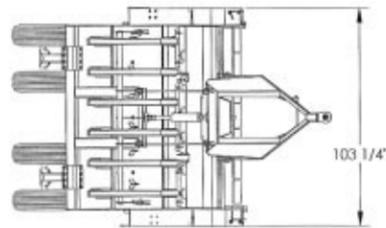


**8' Orchard Shredder
Dual End Drive**

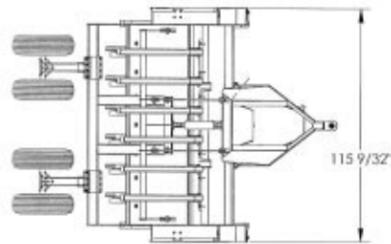


**9' Orchard Shredder
Dual End Drive**

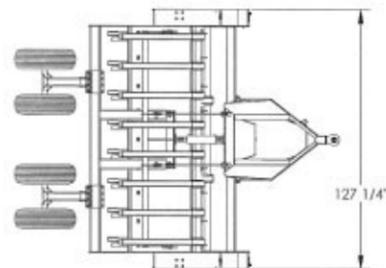

**OPERATING CLEARANCE
WHEN
CYLINDER CLOSED**

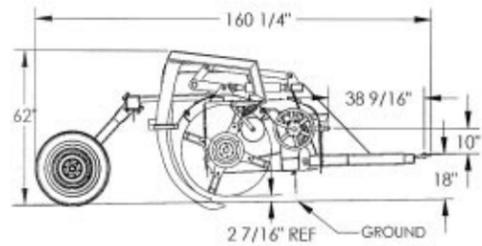

**OPERATING CLEARANCE
WHEN
CYLINDER OPEN FULLY**

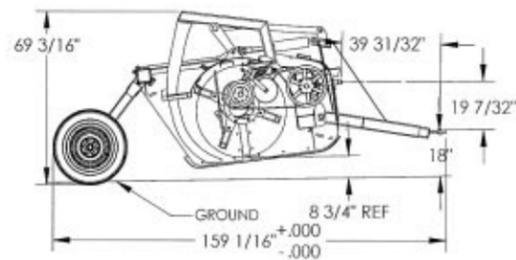

Orchard & Vineyard Shredder



The Branch Buster




STEWARDS FOR AG ENVIRONMENTS



Balzer's Orchard and Vineyard Shredder Pull-type end drive chopper shredder



Features

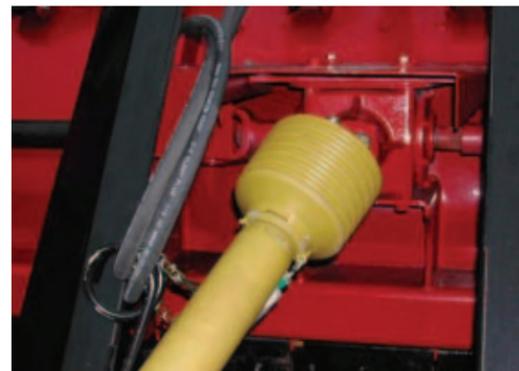

200 H.P. Gear Box



Belt Box



Dual Wheel



Grease Bank



Hydraulic Cylinder Height Adjustment



10" dia. Drum & Side Knives



Heavy Duty Rake



Swivel Hitch



Rake Transport Mode

Standard Features

- 200 H.P. Gearbox (2 year full and 5 year prorated warranty)
- 540 R.P.M. input gear box speed with 1 3/8" tractor end PTO
- Heavy duty CONSTANT VELOCITY PTO with Over-running clutch
- 3 Groove banded belts with oversized 10" spring tension belt tightener
- Dual end drive on 8' units and larger. Single end drive on 7' units and smaller.
- 1/4" Steel hood
- 3/8" Steel end plates
- 7" x 5" x 1/4" front tube and 5" x 5" x 1/4" rear tube for frame durability
- Two (2) Dual wheel assemblies with adjustable spacing
- One (1) hydraulic cylinder with stop for height adjustment
- Four (4) New 9.5L15 Implement Tires
- One - 10" Super duty dynamically balanced rotors with knives
- 5/8" thick knife mount steel
- 1460 R.P.M. rotor speed (TIP SPEED is 163 MPH)
- 2 3/16" U.S. Rotor bearings
- "U" Joints in drive line
- External grease bank
- Knife Mounting: 5/8" x 3" bolt/lock nut with single bushing
- Large/Long 2.1 lbs. Double edge Side Knives
- 2 replaceable Re-cutter bars improves shredding
- Heavy duty Rake (tooth height 0 - 9.5 inches)
- Skid plates
- Steel deflector shields w/ Enclosed Mounting Ends- reduces sticking
- Jack stand
- RED in color

7' Pull Type Single End Drive



Rugged, Proven and Dependable!

Specifications

Model	Size	Description	Knives/Qty	Weight	Wheels
OIS5PT	5'	Pull Type Single End Drive	Side/36	-	2
OIS7PT	7'	Pull Type Single End Drive	Side/48	4,558 lbs.	4
OIS8PT	8'	Pull Type Dual End Drive	Side/54	5,209 lbs.	4
OIS9PT	9'	Pull Type Single End Drive	Side/60	5,860 lbs.	4

Other sizes available - please call our plant 800-795-8551